



IC-F1000T IC-F2000T

VHF AND UHF TRANSCEIVERS



IC-F1000T



IC-F2000T



Little Radio, Big Sound! Class Leading 1500 mW Audio and Full of Great Features

The IC-F1000/F2000 series provides class leading 1500 mW loud and clear audio with Icom custom high power handling capacity speaker. It offers a compact, waterproof durable design and is full of great features such as motion/stationary detection sensor, man down, voice scrambler and voice announcement functions. The radio is ideal for business and industry users who require economical value and reliability in a radio.

Icom custom high power handling capacity speaker for 1500 mW powerful audio

Compact, waterproof durable design (IP67 and MIL-STD-810-G)

Tested to 12 categories of MIL-STD-810-G environmental tests

Enhanced emergency safety with built-in motion/stationary detection sensor

128 channel capacity with eight zones

Built-in 2-Tone, 5-Tone, CTCSS and DTCS

MDC and BISS compatible

16-code inversion voice scrambler

Man down and lone worker functions

Up to 14 hours of operating time with supplied BP-279 battery

16-position rotary selector and ON/OFF volume knob

“Shift key” function increases number of programmable key assignments

Eight character alphanumeric display

Three colour LED

SPECIFICATIONS

	IC-F1000T	IC-F2000T
GENERAL		
Frequency coverage (MHz)	136-174MHz	400-470MHz
Number of channels	128 channels	
Type of emission	16K0F3E /11K0F3E	
Channel spacing	12.5/25kHz	
Power supply requirement	7.5V DC nominal	
Current drain (typical)		
Tx High	1.3A	1.3A
Rx Max.audio/Standby	330mA (internal SP)/77mA	300mA (internal SP)/80mA
Antenna impedance	50Ω	
Operating temperature range	-30°C to +60°; -22°F to +140°F (Radio specification)	
Dimensions (W×H×D) (Projections not included)	52.2×111.8×24.5mm; 2.06×4.4×0.96 in (With BP-279)	
Weight (approx.)	240g; 8.47oz(with BP-279)	
TRANSMITTER		
Output power	5W, 2W, 1W (Hi,L2,L1)	
Max. frequency deviation	±5.0kHz/±2.5kHz (wide/Narrow)	
Frequency stability	±2.5ppm	
Spurious emissions	80dB	75dB
Audio frequency response	+1dB to -3dB of 6dB/ octave range from 300Hz to 3000Hz (Wide) /2550 (Narrow)	
Adjacent channel power	75/70dB (Wide/Narrow)	
FM Hum and noise	55/50dB (Wide/Narrow)	
Audio harmonic distortion	1.0%/1.5% (W/N, AF 1kHz 40% deviation)	
Ext. microphone connector	3-conductor 2.5 (d) mm (1/16")/2.2kΩ	
RECEIVER		
Sensitivity (at 12dB SINAD)	0.25μV	
Adjacent channel selectivity	76/70dB (W/N)	75/70dB (W/N)
Spurious response	80dB	
Audio frequency response	+1dB to -3dB of 6dB/ octave range from 300Hz to 3000Hz (Wide) /2550Hz (Narrow)	
Intermodulation	75dB	
Hum and noise	55/50dB (Wide/Narrow)	
Audio output power	1500mW (at3% distortion)	
External speaker connector	2-conductor 3.5 (d) mm (1/8) 8 Ω	

Measurements made in accordance with TIA-603.

Applicable U.S. Military Specifications & IP Rating

Standard	MIL 810G	
	Method	Procedure
Low Pressure	500.5	I, II
High Temperature	501.5	I, II
Low Temperature	502.5	I, II
Temperature Shock	503.5	I- C
Solar Radiation	505.5	I
Rain Blowing/Drip	506.5	I, III
Humidity	507.5	II
Salt Fog	509.5	—
Dust Blowing	510.5	I
Immersion	512.5	I
Vibration	514.5	I
Shock	516.5	I, IV

Also meets equivalent MIL-STD-810-C, -D, -E and -F.

Ingress Protection Standard	
Dust and Water	IP67 (Dust-tight and waterproof protection)

Icom, Icom Inc. and Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. All trademarks are the properties of their respective holders.

Icom Inc.

1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icom.co.jp/world

Count on us!

Icom America Inc.

12421 Willows Road NE,
Kirkland, WA 98034, U.S.A.
Phone: +1 (425) 454-8155
Fax: +1 (425) 454-1509
E-mail: sales@icomamerica.com
URL: <http://www.icomamerica.com>

Icom Canada

Glenwood Centre #150-6165
Highway 17A, Delta, B.C.,
V4K 5B8, Canada
Phone: +1 (604) 952-4266
Fax: +1 (604) 952-0090
E-mail: info@icomcanada.com
URL: <http://www.icomcanada.com>

Icom Brazil

Rua Itororó, 444 Padre Eustáquio
Belo Horizonte MG,
CEP: 30720-450, Brazil
Phone: +55 (31) 3582 8847
Fax: +55 (31) 3582 8987
E-mail: sales@icombrasil.com

Icom (Europe) GmbH

Communication Equipment
Auf der Krautweide 24
65812 Bad Soden am Taunus, Germany
Phone: +49 (6196) 76685-0
Fax: +49 (6196) 76685-50
E-mail: info@icom-europe.com
URL: <http://www.icom-europe.com>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Bajos A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone: +34 (93) 590 26 70
Fax: +34 (93) 589 04 46
E-mail: icom@icomspain.com
URL: <http://www.icomspain.com>

Icom (UK) Ltd.

Blacksole House, Altira Park,
Herne Bay, Kent, CT6 6GZ, U.K.
Phone: +44 (0) 1227 741741
Fax: +44 (0) 1227 741742
E-mail: info@icomuk.co.uk
URL: <http://www.icomuk.co.uk>

Icom France s.a.s.

Zac de la Plaine,
1 Rue Brindejonc des Moulins, BP 45804,
31505 Toulouse Cedex 5, France
Phone: +33 (5) 61 36 03 03
Fax: +33 (5) 61 36 03 00
E-mail: icom@icom-france.com
URL: <http://www.icom-france.com>

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone: +61 (03) 9549 7500
Fax: +61 (03) 9549 7505
E-mail: sales@icom.net.au
URL: <http://www.icom.net.au>

Icom New Zealand

39C Rennie Drive, Airport Oaks,
Auckland, New Zealand
Phone: +64 (09) 274 4062
Fax: +64 (09) 274 4708
E-mail: inquiries@icom.co.nz
URL: <http://www.icom.co.nz>

Asia Icom Inc.

6F No.68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: +886 (02) 2559 1899
Fax: +886 (02) 2559 1874
E-mail: sales@asia-icom.com
URL: <http://www.asia-icom.com>

Shanghai Icom Ltd.

No.101, Building 9, Caifuxingyuan Park,
No.188 Maoting Road, Chedun Town,
Songjiang District, Shanghai, 201611, China
Phone: +86 (021) 6153 2768
Fax: +86 (021) 5765 9987
E-mail: bjicom@bjicom.com
URL: <http://www.bjicom.com>

OPTIONS

Some options may not be available in some contries. Please ask your dealer for details








Battery packs	Type	Capacity	Operatings time*
BP-279	Li-ion 7.2V	1600mAh	14 hours (Approx.)
BP-280	Li-ion 7.2V	2450mAh	20 hours (Approx.)

*Tx: Rx; standby = 5:5:90. Power save function ON.
Capacity : Typical Spec.



*1 BC-123SA for 120V AC, SE for 230V AC, SV for 240V AC.

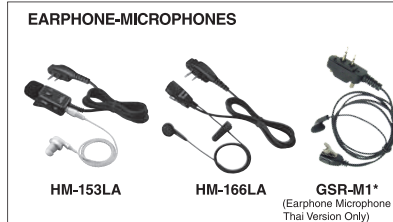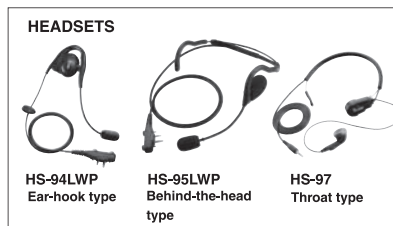

- STANDARD ANTENNAS**
- FA-SC25V: 136-150MHz • FA-SC72U: 470-520MHz
 - FA-SC55V: 150-174MHz • FA-SC01U: 350-400MHz
 - FA-SC25U: 400-430MHz • FA-SC25V: 330-380MHz
 - FA-SC57V: 430-470MHz
- STUBBY ANTENNAS**
- FA-SC26VS: 136-144MHz • FA-SC26US: 400-450MHz
 - FA-SC27VS: 142-150MHz • FA-SC73US: 450-490MHz
 - FA-SC56VS: 150-162MHz
 - FA-SC57VS: 162-174MHz
- CUT ANTENNAS HIGH GAIN ANTENNAS**
- FA-SC61VC: 136-174MHz • FA-SC62V: 150-160MHz
 - FA-SC61UC: 380-520MHz • FA-SC63V: 155-165MHz

- Supplied accessories:** (May differ depending on version)
- Battery pack, BP-279 or BP-280
 - Desktop charger, BC-213
 - AC adapter, BC-123S
 - Belt clip, MB-133
 - Antenna



The "3D GENUINE Icom label" is attached to the rear chassis under the battery.
Check the Icom website for details: <http://www.icom.co.jp/world/genuine-info/>

Your local distributor/dealer:

บริษัท เวิลด์ วาย เรดิโอ จำกัด

9/12,14 หมู่ที่ 3 ตำบลบางม่วง
อำเภอบางใหญ่ จังหวัดนนทบุรี 11140

โทร : 081-6351458, 02-4033425-7

Email : world_wireradio@hotmail.com